


# Wrap Pack-II Specifications

## Park Place Packaging

### CONTAINER STYLE:

Case Packer can be tooled to handle Full-Wrap-Around Printer-Slotter or Die-Cut style case with RSC, FOL, POL or shyed flaps and easy open features, or trays with a minimum sidewall of 2-1/4" high.

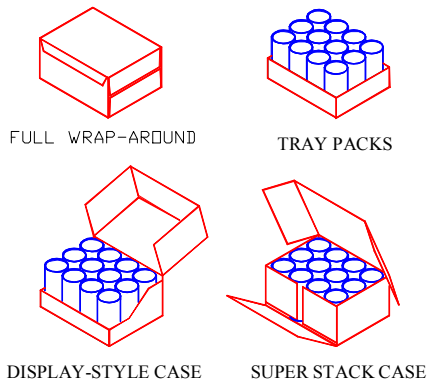

### Operating Speed:

Case Packer up to 25 cases per minute.

### Utilities:

Electrical: 460 VAC, 3 Phase, 60 Hz, 20 Amps

Air: 3/4" NPT., 2.5 CFM, 80 PSIG—Minimum

Consult with manufacturer regarding utility options.

### Adhesive System:

Standard: - Hot Melt Spray Glue System

Optional: - Cold Spray Glue System or

- Tape Applicator System

### Floor Space

Case Packer base machine approximately 11' x 10' x 7'  
high not including infeed & outfeed systems.

### Package Size Range:

"W" 9" to 20"

"L" 7" to 14"

"H" 3" to 10"

